


## TYPE 21 MECHANICAL SEALS

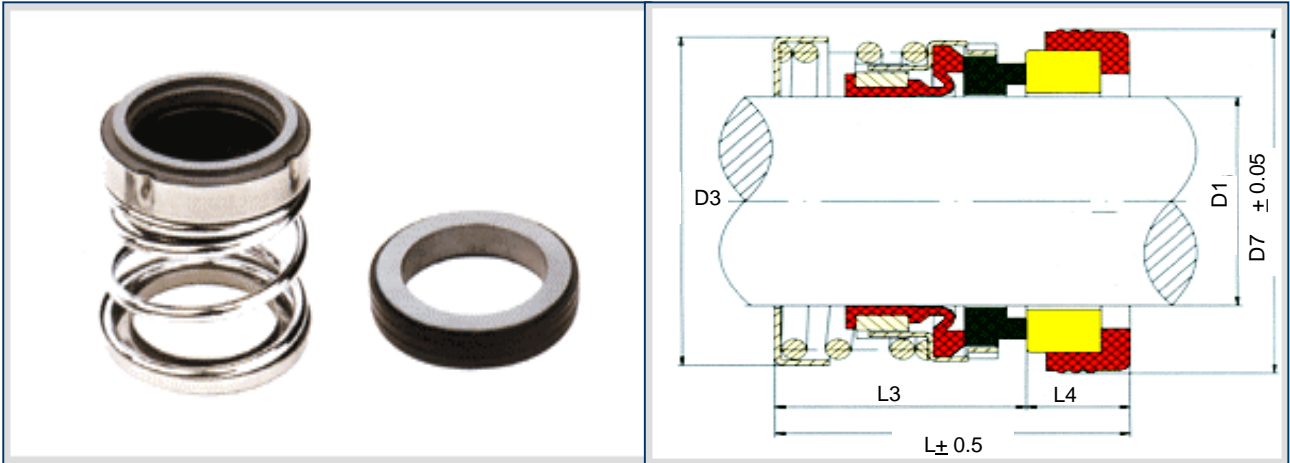

D1	D3	D7	L3	L4	L = L3+L4
T21-0.375	21.00	22.20	22.20	6.30	28.50
T21-0.500	23.00	25.40	22.20	8.00	30.20
T21-0.625	27.00	31.80	22.20	10.30	32.50
T21-0.750	31.00	35.00	22.20	10.30	32.50
T21-0.875	34.00	38.10	24.00	10.30	34.30
T21-1.000	40.00	41.30	25.40	11.00	36.40
T21-1.125	45.00	44.50	27.00	11.00	38.00
T21-1.250	47.00	47.70	27.00	11.00	38.00
T21-1.375	52.00	50.80	28.50	11.00	39.50
T21-1.500	54.00	54.00	28.50	11.00	39.50
T21-1.625	58.00	60.30	35.00	12.70	47.70
T21-1.750	62.00	63.50	35.00	12.70	47.70
T21-1.875	66.00	66.70	38.00	12.70	50.70
T21-2.000	71.00	69.90	38.00	12.70	50.70
T21-2.125	75.00	76.20	43.00	14.30	57.30
T21-2.250	79.00	79.40	43.00	14.30	57.30
T21-2.375	82.00	82.60	46.00	14.30	60.30
T21-2.500	85.00	85.70	46.00	14.30	60.30
T21-2.625	92.00	85.70	49.00	16.00	65.00
T21-2.750	92.00	88.90	49.00	16.00	65.00
T21-2.875	99.00	95.30	52.50	16.00	68.50
T21-3.000	99.00	98.40	52.50	16.00	68.50

**Operating Parameters:**

Temp: -30 C - 200 C.

(Depending on material used)

Pressure: Up to 10 Bar, 145 PSI.

Shaft Speed: Up to 13 m/sec.

**Face Combinations:**

Carbon, Ceramic, Silicon, Tungsten

**Elastomers:**

Nitrile, Viton, EPDM.