


TYPE S5 MECHANICAL SEALS

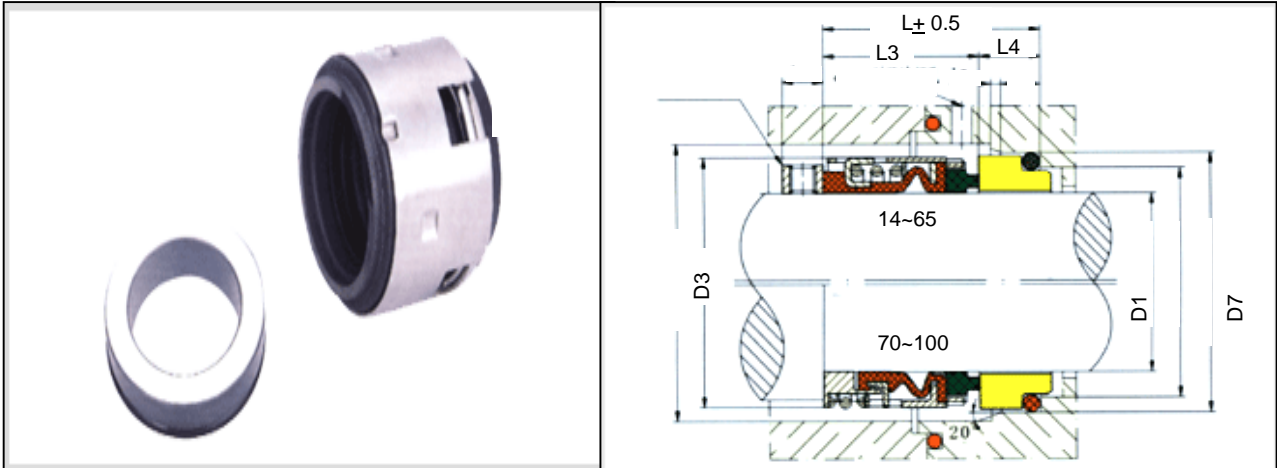

D1	D3	D7	L3	L4	L= L3+L4
S5-14	24	25	23.0	12.0	35.0
S5-16	26	27	23.0	12.0	35.0
S5-18	32	33	24.0	13.5	37.5
S5-20	34	35	24.0	13.5	37.5
S5-22	36	37	24.0	13.5	37.5
S5-24	38	39	26.7	13.3	40.0
S5-25	39	40	27.0	13.0	40.0
S5-28	42	43	30.0	12.5	42.5
S5-30	44	45	30.5	12.0	42.5
S5-32	46	48	30.5	12.0	42.5
S5-33	47	48	30.5	12.0	42.5
S5-35	49	50	30.5	12.0	42.5
S5-38	54	56	32.0	13.0	45.0
S5-40	56	58	32.0	13.0	45.0
S5-43	59	61	32.0	13.0	45.0
S5-45	61	63	32.0	13.0	45.0
S5-48	64	66	32.0	13.0	45.0
S5-50	66	70	34.5	13.0	47.5
S5-53	69	73	34.0	13.5	47.5
S5-55	71	75	34.0	13.5	47.5
S5-58	78	78	39.0	13.5	52.5
S5-60	80	80	39.0	13.5	52.5
S5-63	83	83	39.0	13.5	52.5
S5-65	85	85	39.0	13.5	52.5
S5-68	88	90	39.0	13.5	52.5
S5-70	89	92	45.5	14.5	60.0
S5-75	96	97	45.5	14.5	60.0
S5-80	104	105	45.5	14.5	60.0
S5-85	108	110	45.0	15.0	60.0
S5-90	114	115	50.0	15.0	65.0
S5-95	118	120	50.0	15.0	65.0
S5-100	124	125	50.0	15.0	65.0

Operating Parameters:

Temp: -30 C - 200 C.
 (Depending on material used)
 Pressure: Up to 40 Bar, 435 PSI
 Shaft Speed: Up to 13 m/sec 2500 FPM

Face Combinations:

Carbon, Ceramic, Silicon, Tungsten

Elastomers:

Nitrile, Viton, EPDM.