

ORIGINAL™ Series Metal Clamped Pumps

Features

- ADS: Pro-Flo® Shift, Pro-Flo®, Pro-Flo X™, Turbo-Flo, Accu-Flo™
- Anti-freezing technology
- Large solids passage
- Portable & submersible
- Screen base options
- Multiple liquid connections available
- Lube-free options

Tech Data



- Sizes: 6 mm (1/4") through 102 mm (4")
- Materials: Aluminum, Ductile Iron, Stainless Steel, Alloy C
- Material Temperatures: Up to 177°C (350°F)
- Elastomers: Buna-N, Neoprene, EPDM, Viton®, Wil-Flex™, Saniflex™, Polyurethane, PTFE, Geolast®

Performance Data



- Max. flow rate: 1211 lpm (320 gpm)
- Max. suction lift: 9.5 m (31.2') wet, 7.6 m (25.0') dry
- Max. disp. per stroke: 4.73 L (1.25 gal)
- Max. discharge pressure: 8.6 bar (125 psig)
- Max. solids passage: 35 mm (1-3/8")

METAL CURVES



P.025
6 mm (1/4")
METAL

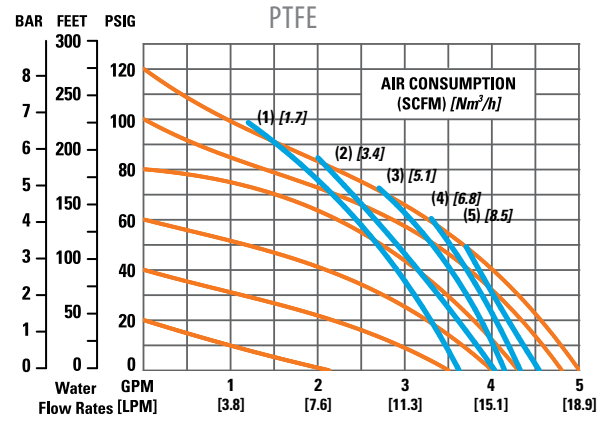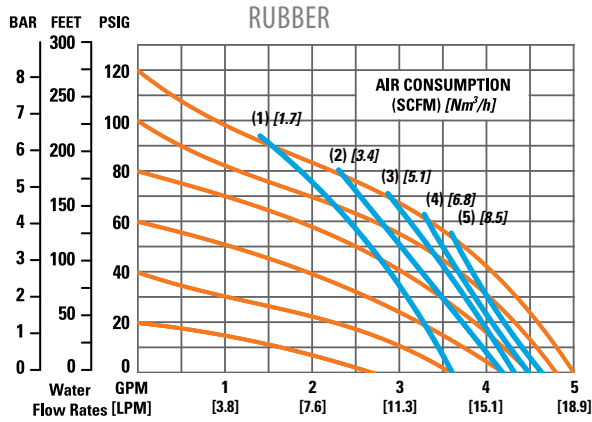



P1
13 mm (1/2")
METAL

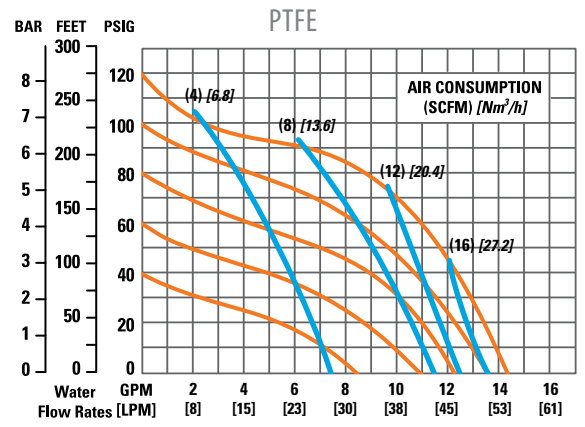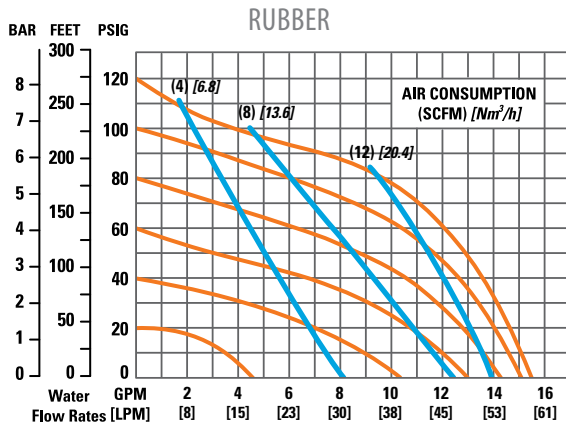

PX1
13 mm (1/2")
METAL

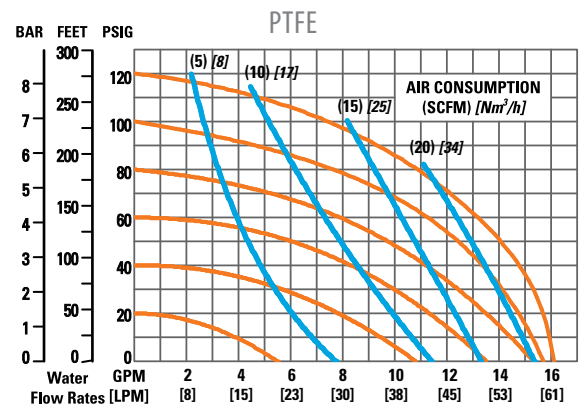
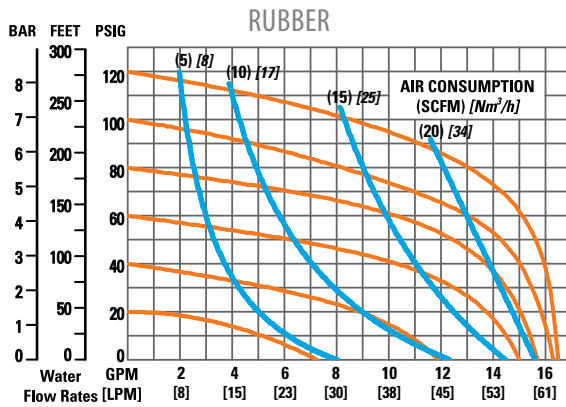


T1
13 mm (1/2")
METAL

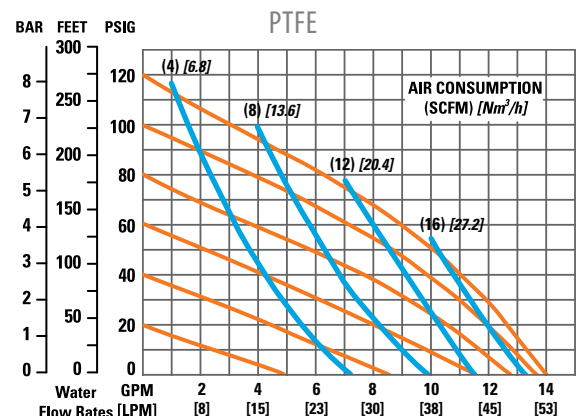
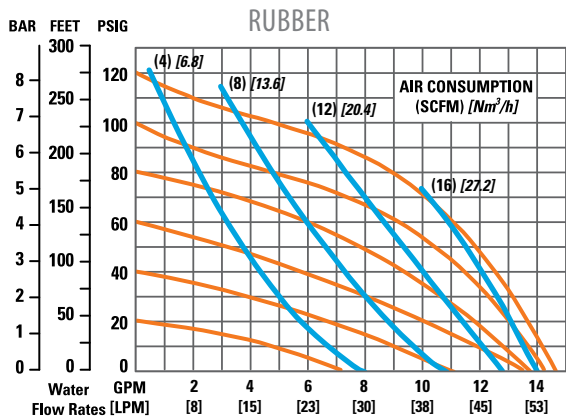


METAL CURVES



T2
25 mm (1")
METAL

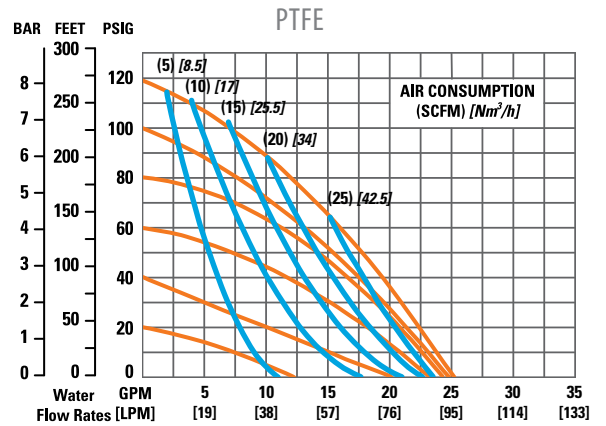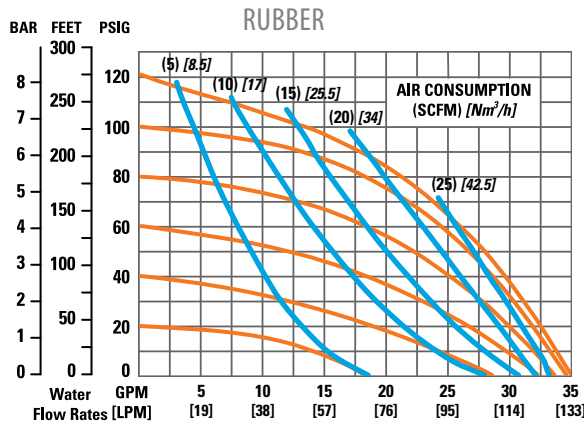



P4
38 mm (1-1/2")
METAL

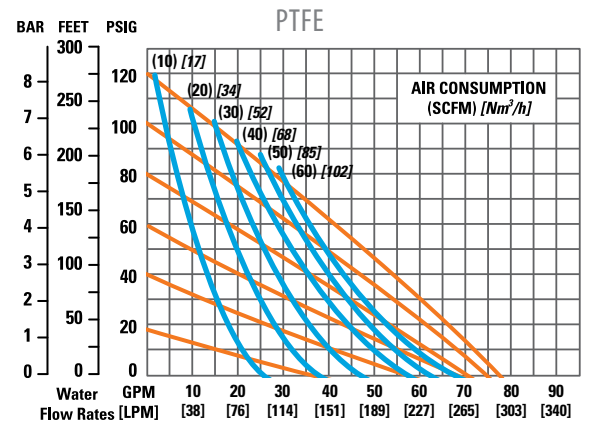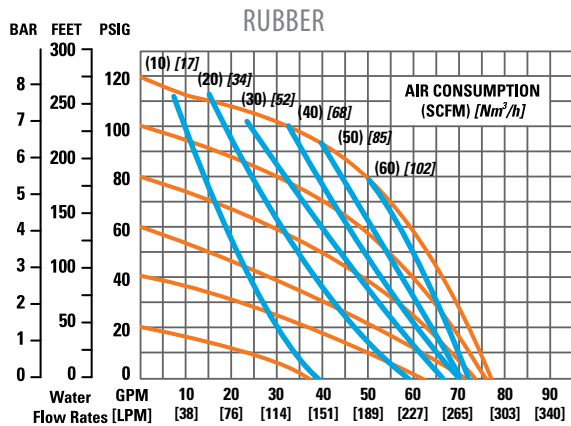

PX4
38 mm (1-1/2")
METAL

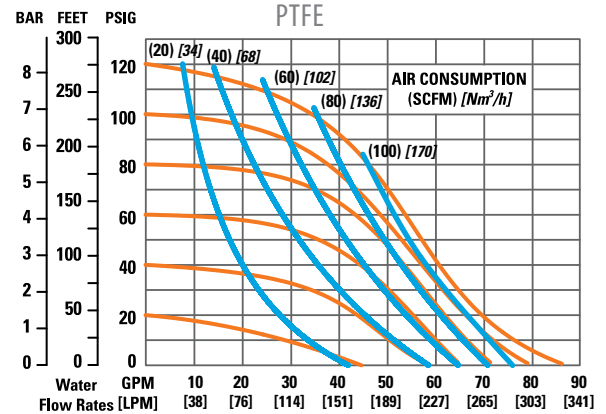
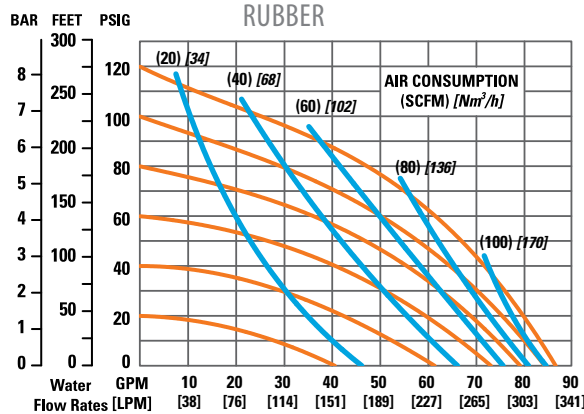


PS4
38 mm (1-1/2")
METAL

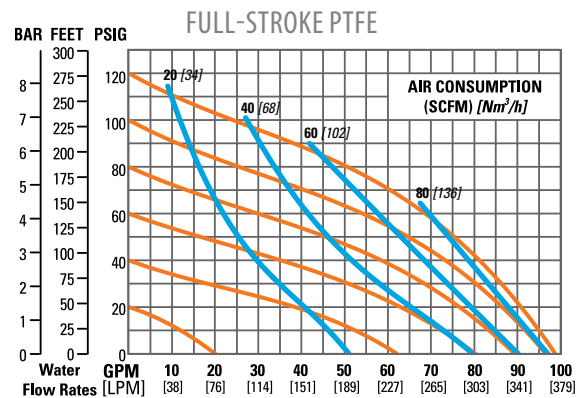
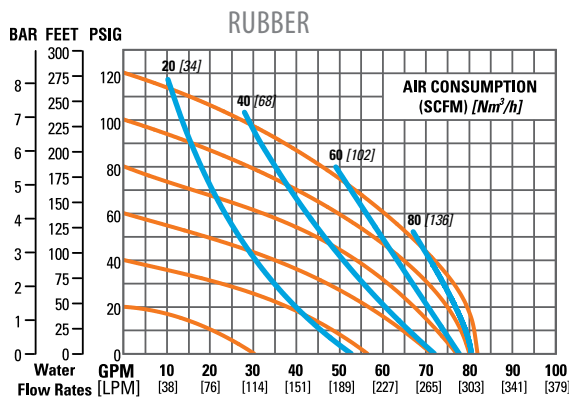


METAL CURVES



T4
38 mm (1-1/2")
METAL

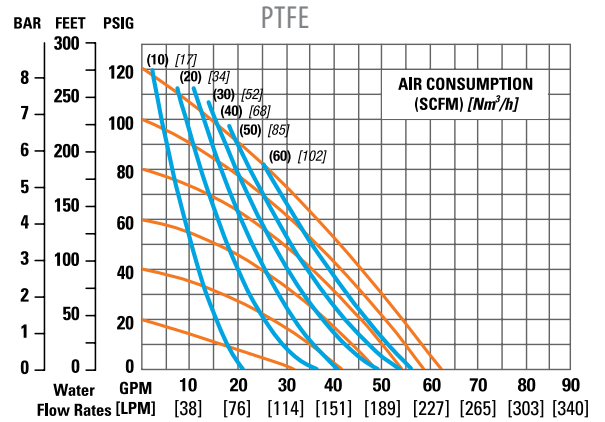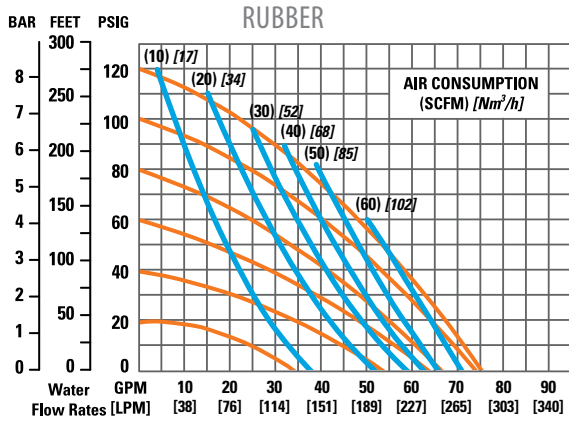



P8
51 mm (2")
METAL

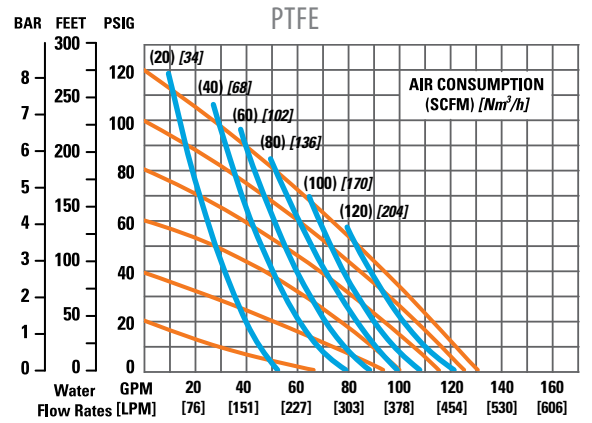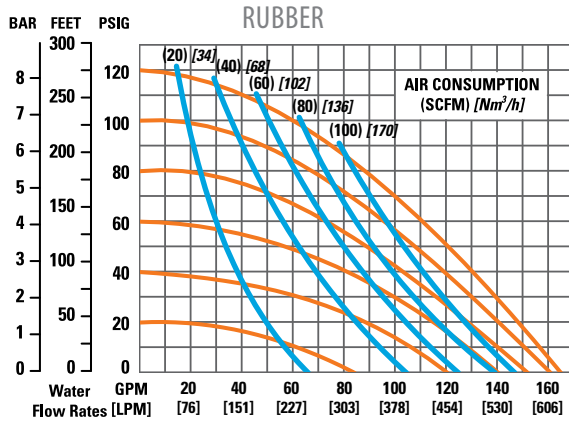

PX8
51 mm (2")
METAL

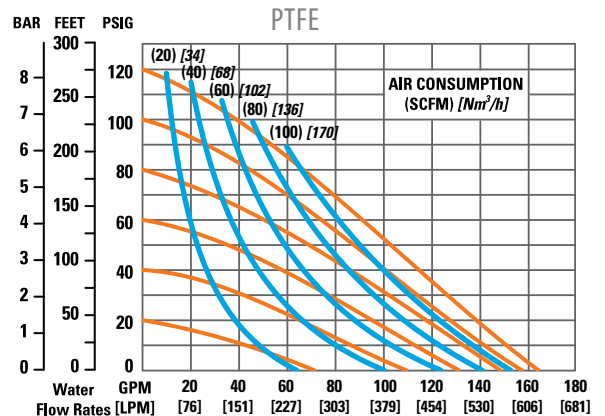
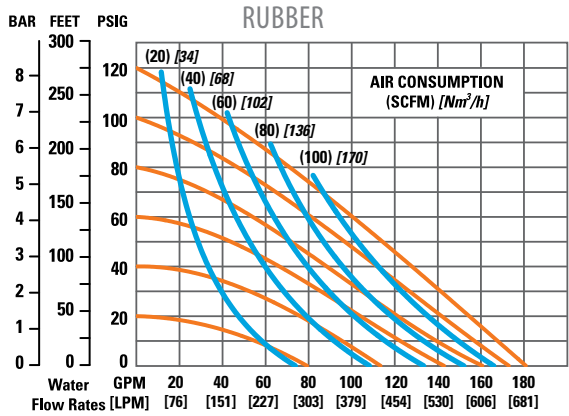


PS8
51 mm (2")
METAL

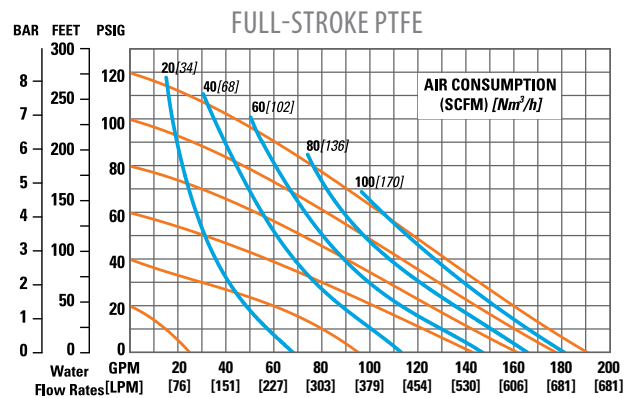
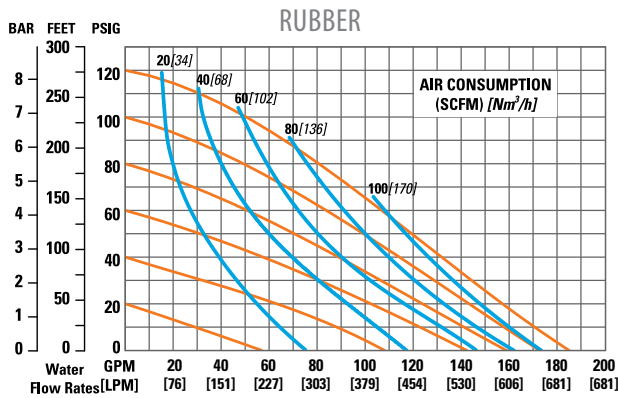


METAL CURVES



T8
51 mm (2")
METAL

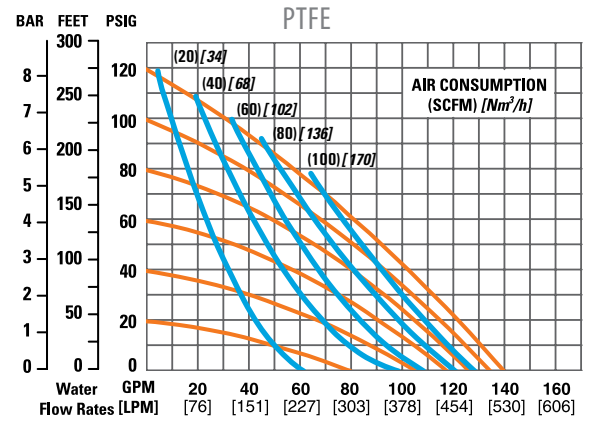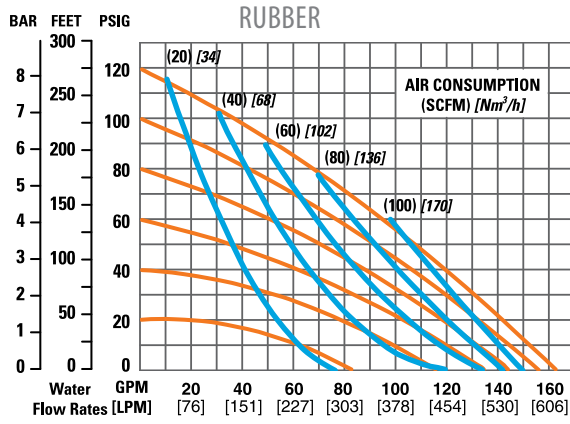

PX15
76 mm (3")
METAL

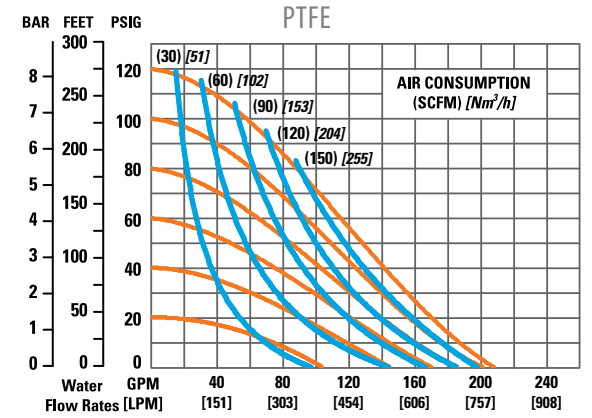
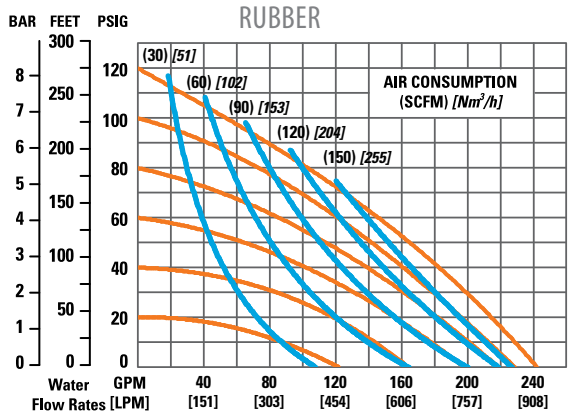


PS15
76 mm (3")
METAL

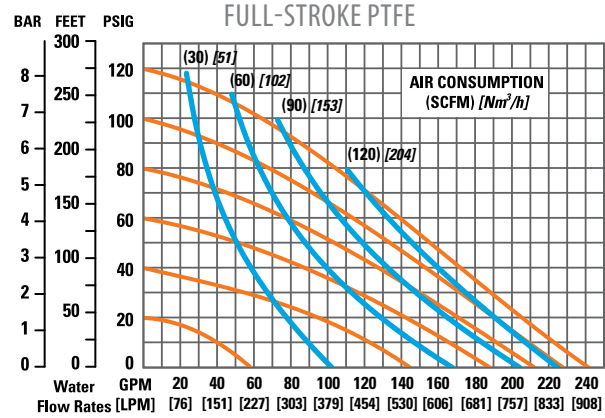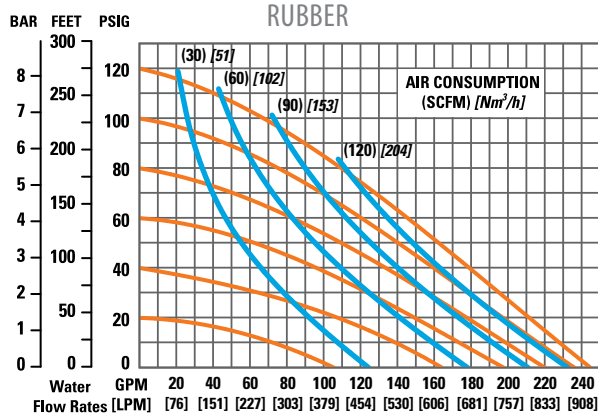

METAL CURVES

T15
76 mm (3")
METAL

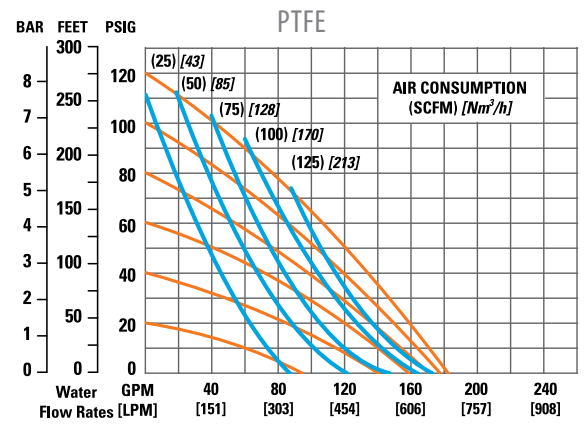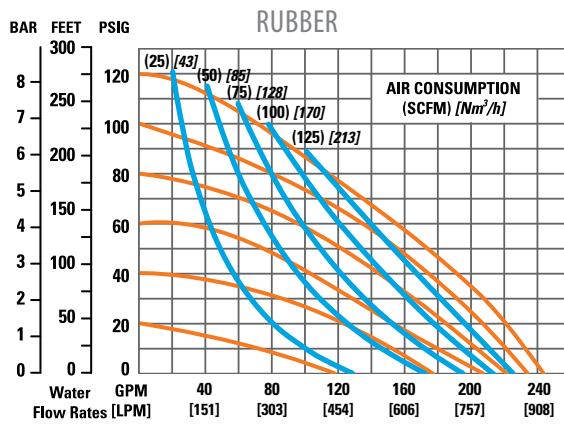

PX20
102 mm (4")
METAL

