



Construction

Close coupled electric submersible pumps.

GMC: with single-channel impeller.

GMV: with free-flow (vortex) impeller.

Double mechanical shaft seal with interposed oil chamber, to protect against dry-running.

Applications

For domestic or industrial waste water, dirty water with solids up to 45 mm grain size, for liquids which are compatible with the pump materials.

Operating conditions

Liquid temperature up to 35 °C.

pH value: 6-11.

Maximum immersion depth: 10 m (with suitable cable length).

Continuous duty (with submerged motor).

Motor

2-pole induction, 50 Hz (n = 2900 rpm).

GMC, GMV: three-phase 230 V ± 10%;
three-phase 400 V ± 10%;
2 built-in thermal protectors to be connected to a control box.

Cable: 4x1,5 mm²+ 2x0,5 mm², length 10 m.

GMCM, GMVM: single-phase 230 V ± 10%.

With float switch, built-in thermal protector and built-in capacitor.

Cable: H07RN-F, 3x1,5 mm², length 10 m, with plug (CEI - UNEL 47166).

Insulation class F. Protection IP X8.



Triple impregnation, humidity-proof winding.

Constructed in accordance with: EN 60 335-2-41.

Materials

Component	Material
Pump casing	Cast iron GJL 200 EN 1561
Casing cover	
Impeller	
Motor housing	
Motor cover	
Shaft	Chrome steel 1.4016 EN 10088 (AISI 430)
Mechanical seal: Upper	Carbon, ceramic, NBR
Lower	
Seal lubrication oil	Oil for food machinery and pharmaceutical use

Characteristic curves n ≈ 2900 rpm

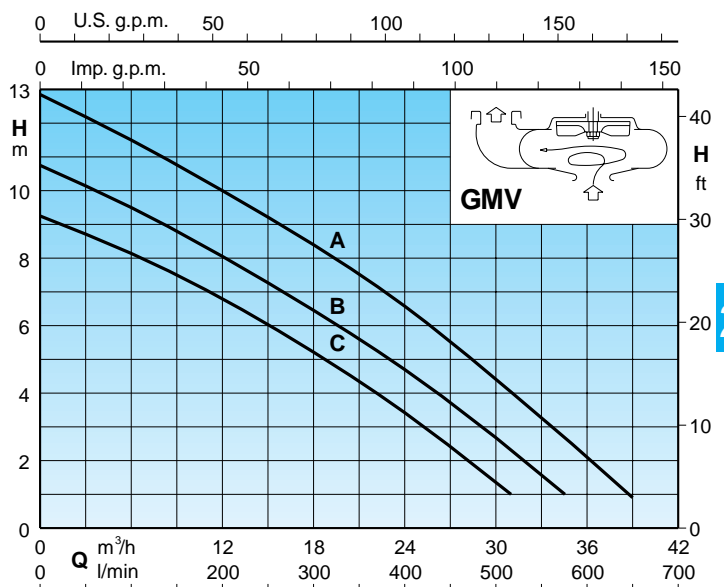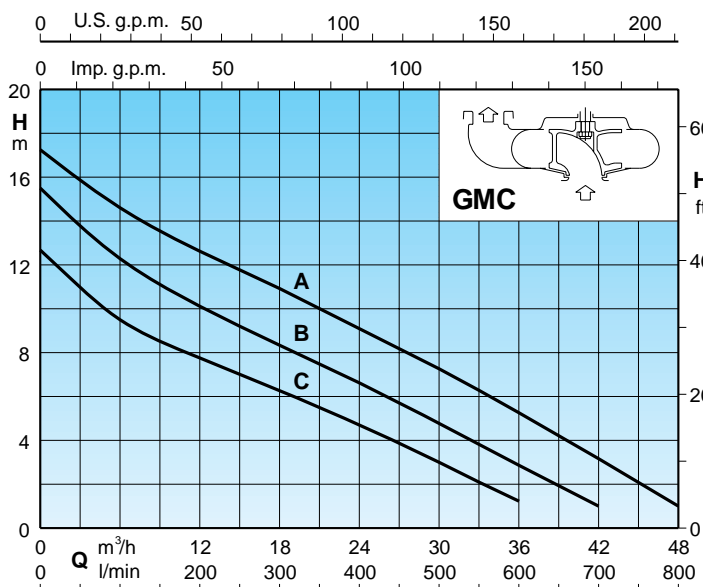

Performance $n \approx 2900$ rpm

3~	230 V 400 V		1~	230 V	P ₁	P ₂		Q	H m								
	A	A				A	kW		kW	HP	m ³ /h	6	12	18	24	30	36
									l/min	100	200	300	400	500	600	700	800
GMC 50CE	3,3	1,9	GMCM 50CE	4,5	1,1	0,75	1	H m	9,5	8	6,5	5	3	1			
GMC 50BE	4,8	2,7	GMCM 50BE	6,5	1,5	1,1	1,5		12,5	10	8,5	6,5	5	3	1		
GMC 50AE	6,6	3,8					2		14,5	12,5	11	9	7,5	5,5	3	1	

3~	230 V 400 V		1~	230 V	P ₁	P ₂		Q	H m								
	A	A				A	kW		kW	HP	m ³ /h	6	12	18	24	30	31
									l/min	100	200	300	400	500	516	583	650
GMV 50CE	3,3	1,9	GMVM 50CE	4,5	1,1	0,75	1	H m	8	7	5	3,5	1,5	1			
GMV 50BE	4,8	2,7	GMVM 50BE	6,5	1,5	1,1	1,5		9,5	8	6,5	4,5	2,5	2,3	1		
GMV 50AE	6,6	3,8					2		11,5	10	8,5	6,5	4,3	4	2,5	1	

P₁ Max. power input.


H Total head in m.

Density $\rho = 1000$ kg/m³.

Kinematic viscosity $\nu = \max 20$ mm²/sec.

P₂ Rated motor power output.

Dimensions and weights

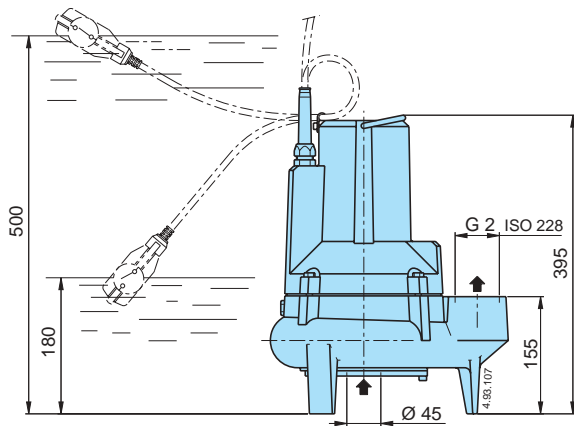

	kg
GMC 50CE	28
GMC 50BE	29
GMC 50AE	30,5
GMCM 50CE	28
GMCM 50BE	29,5

	kg
GMV 50CE	27
GMV 50BE	28
GMV 50AE	29,5
GMVM 50CE	27
GMVM 50BE	28,5

