



ASP Range Surface Pump

- Stainless steel wear resistant rotor with hard chrome plating and stainless steel shaft for corrosion-free long life
- Titanium Tuff Flexishaft® for improved strength, corrosion resistance and a shorter pump
- The Mono ASP has excellent self priming and suction capabilities
- Energy saving efficient pump design. The Mono ASP Motorotor® gets the most out of any power bill

Features

- Sand, Silt Tolerant
- Easy Priming
- Long Delivery
- Consistent Flow vs Head
- Shallow Wells

Applications include:

- Tank Filling
- Stock Watering
- Dam Water
- Creek Water
- Shallow Wells

Complete Packaged Systems:

Diesel:

Available with either Yanmar or Kubota diesel motors.

Petrol:

Honda petrol motor.

Electric:

240V / 480V - 1 phase
415V - 3 Phase

Package Includes:

- Pump
- Motor
- Clutch
- Belt & Pulleys
- Galvanised Base
- Safety Guard



Positive Drive Shaft

High quality, robust, keyed drive for positive power transmission.

Bearing Housing

Industrial strength bearings are easy to get at and maintain.

Secure Seals

Simple, single mechanical seal.

Turbulence Stops Here

High capacity discharge chamber for smooth flow.

4-Way delivery

is possible - left, right, up or down to suit your connections.

Stainless Steel Barrel

Corrosion resistant for longer life.

Titanium Flexishaft Strength


Eliminates coupling wear, friction and corrosion.

Rotor & Stator



These capsules of water spiral smoothly through your Mono ASP as the stainless steel rotor gently revolves against the rubber stator.

Close Coupled Motor


Effectively one moving part from motor to rotor for maximum energy efficiency, strength and simplicity.

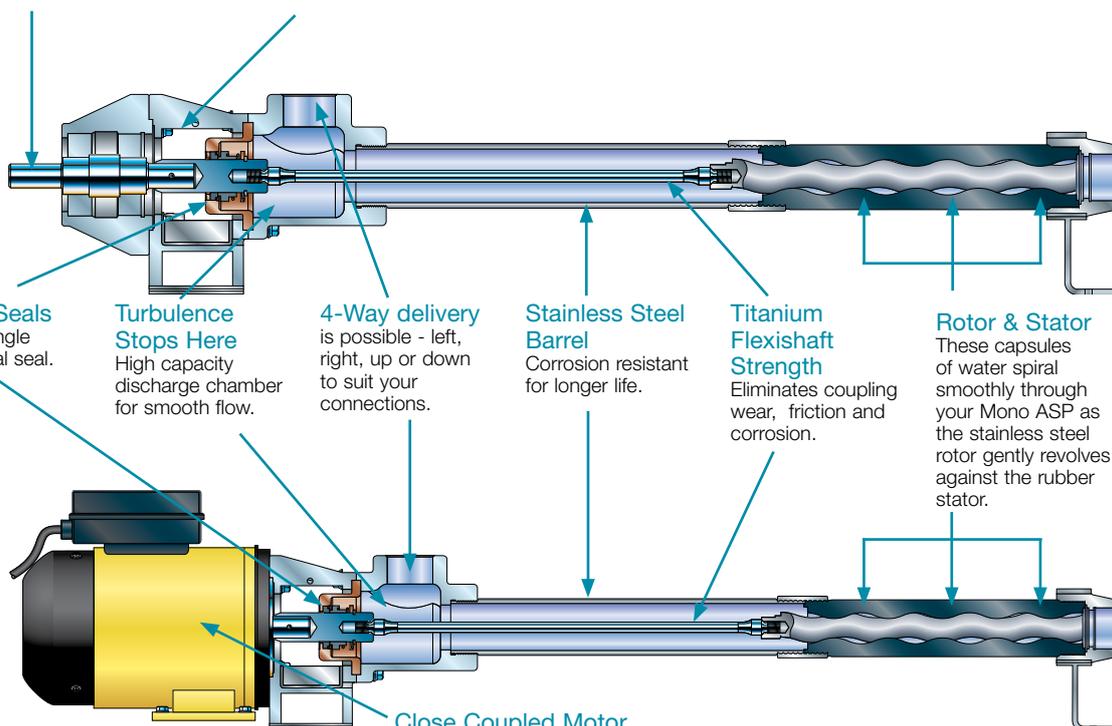

Performance Data

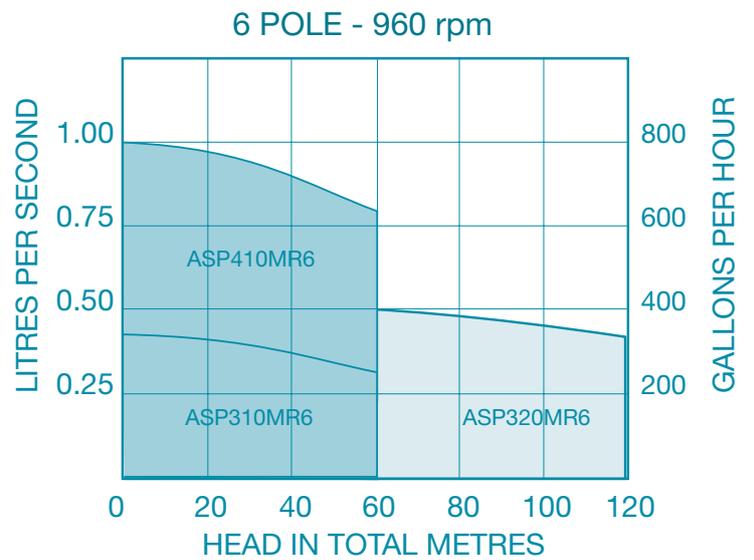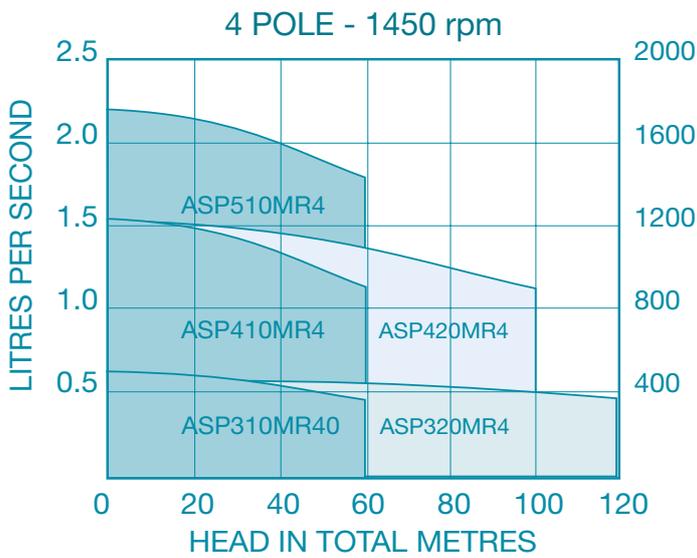

BARESHAF T PUMP

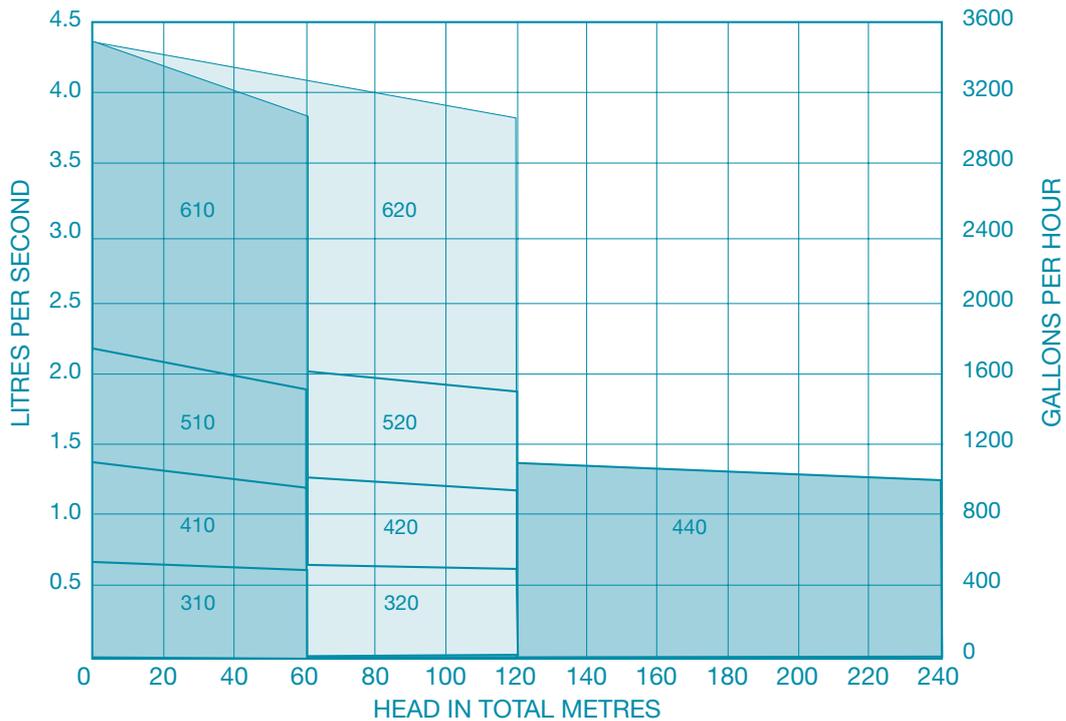

TITANIUM TUFF

2
Year
Flexishaft
Warranty