

ADVANCED™ Series Metal Bolted Pumps

Features

- ADS: Pro-Flo® SHIFT, Pro-Flo®, Pro-Flo X™, Accu-Flo™
- All metal bolted construction
- Higher flow rates
- Superior containment
- Anti-freezing technology
- Portable & submersible
- BSPT (NPT) or DIN (ANSI) liquid connections available
- Lube-free operation

Tech Data



- Sizes: 6 mm (1/4") through 76 mm (3")
- Materials: Aluminum, Ductile Iron, Stainless Steel, Alloy C
- Elastomer Temperatures: Up to 177°C (350°F)
- Elastomers: Buna-N, Neoprene, EPDM, Viton®, Wil-Flex™, Saniflex™, Polyurethane, PTFE, Geolast®

Performance Data



- Max flow rates: 1021 lpm (270 gpm)
- Max suction lift: 9.5 m (31.2') Wet, 7.6 m (25.0') Dry
- Max disp. per stroke: 6.09 L (1.61 gal)
- Max discharge pressure: 20.6 bar (300 psig)
- Max size solids: 76 mm (3")

METAL CURVES



P200
25 mm (1")
METAL

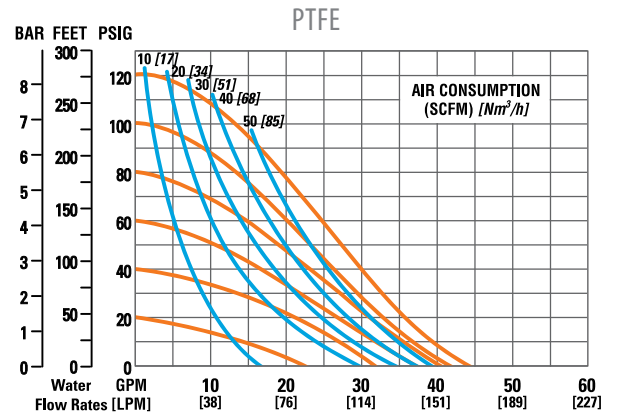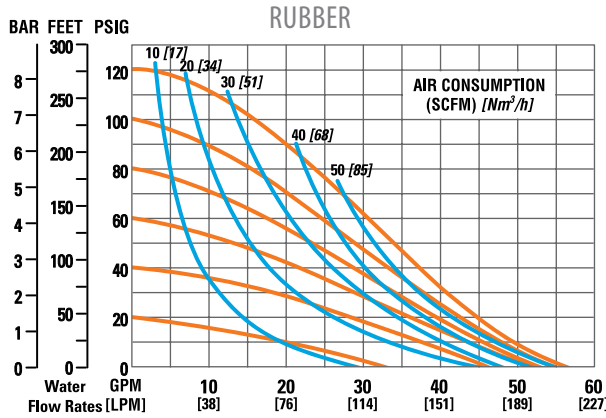



PX200
25 mm (1")
METAL

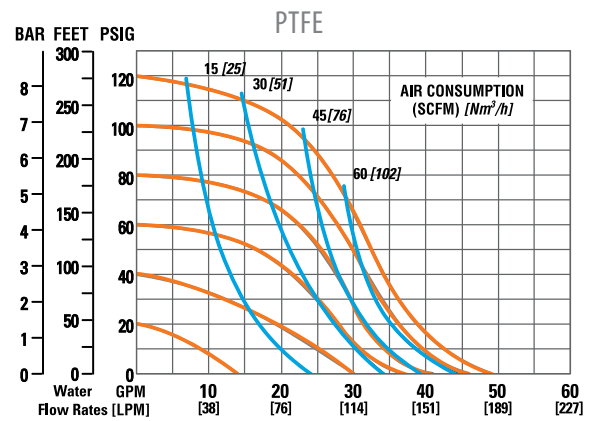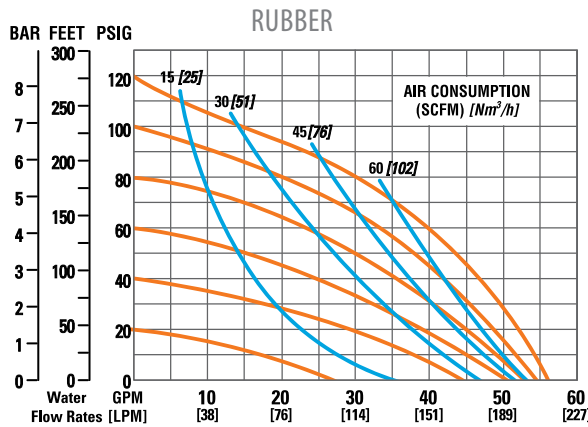

P400
38 mm (1-1/2")
ALUMINUM

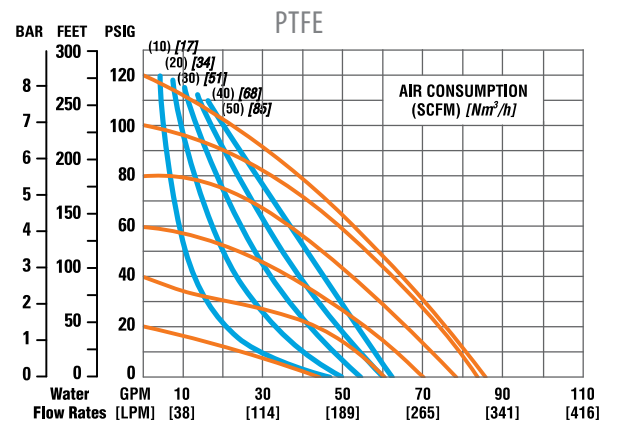
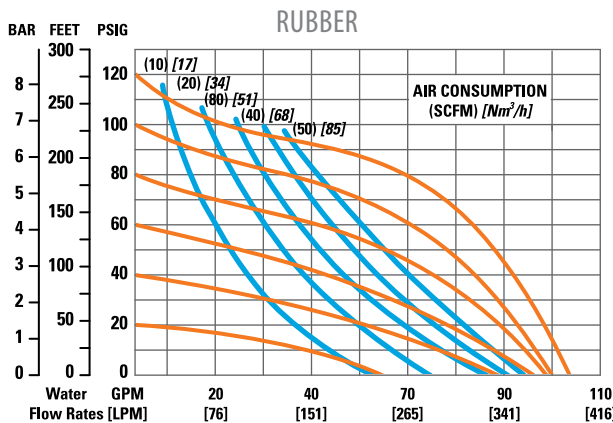


P400
38 mm (1-1/2")
STAINLESS STEEL

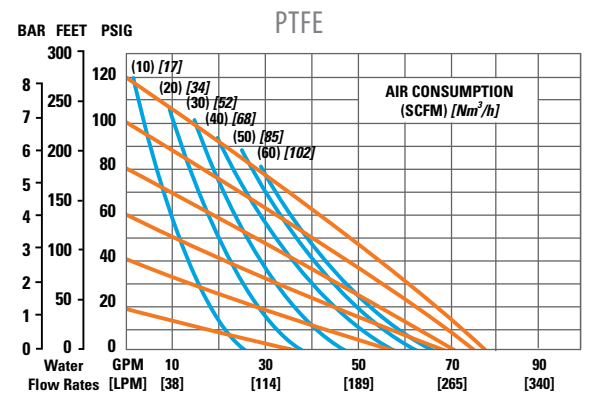
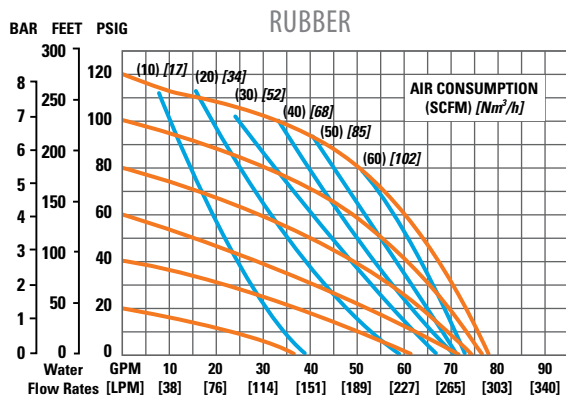


METAL CURVES



PX400
38 mm (1-1/2")
ALUMINUM

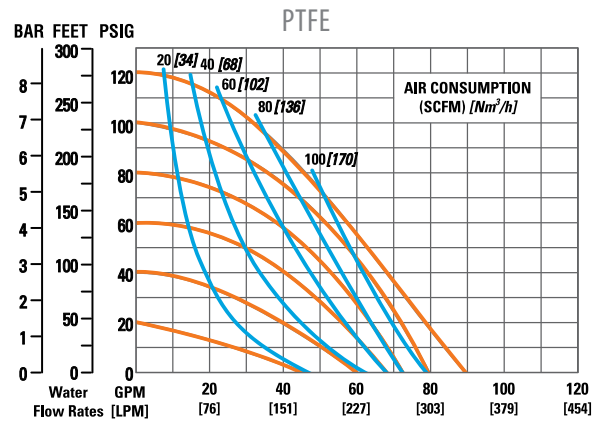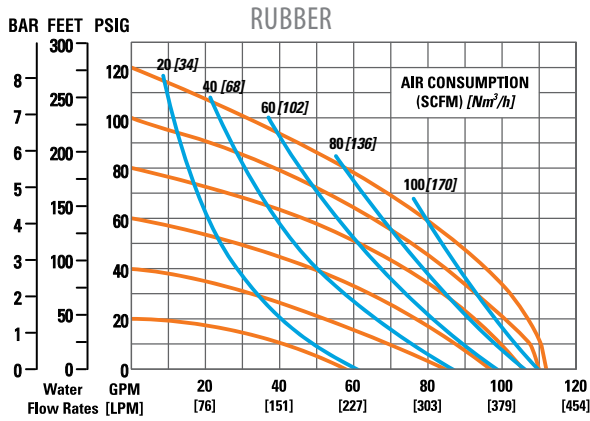



PX400
38 mm (1-1/2")
STAINLESS STEEL

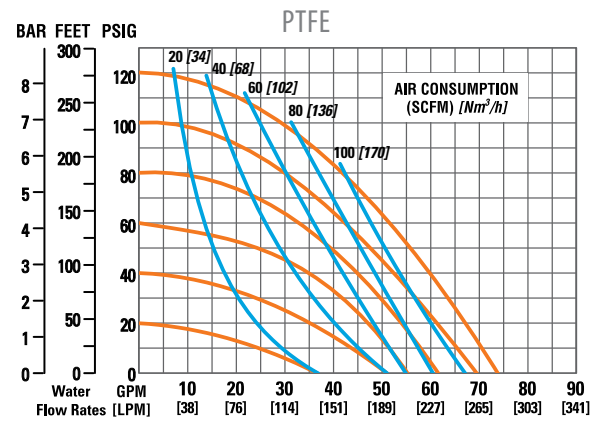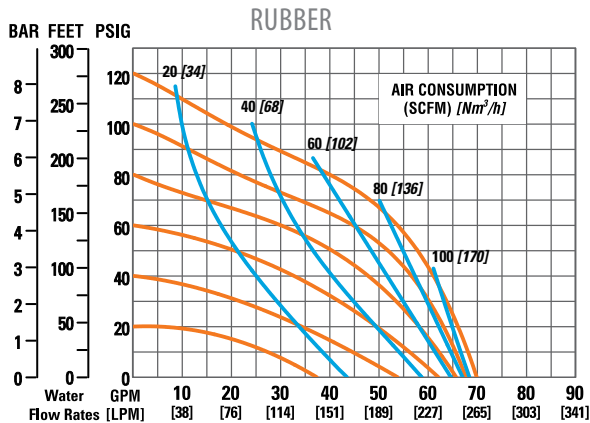

PS400
38 mm (1-1/2")
ALUMINUM

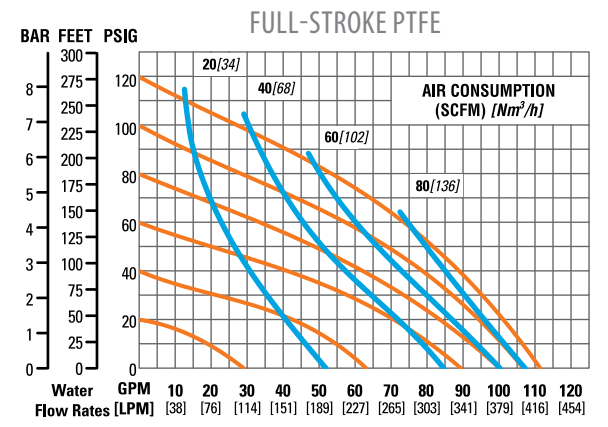
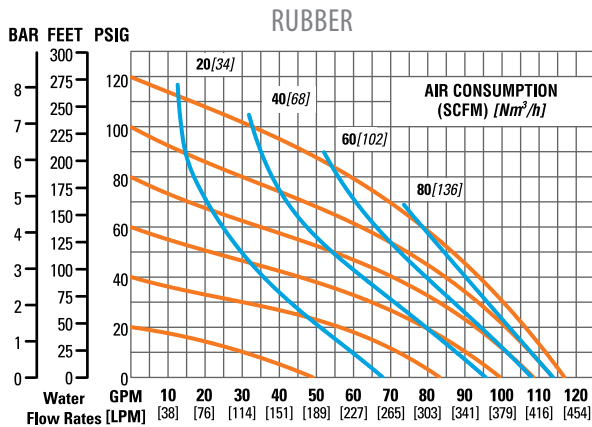


PS400
38 mm (1-1/2")
STAINLESS STEEL
DROP-IN

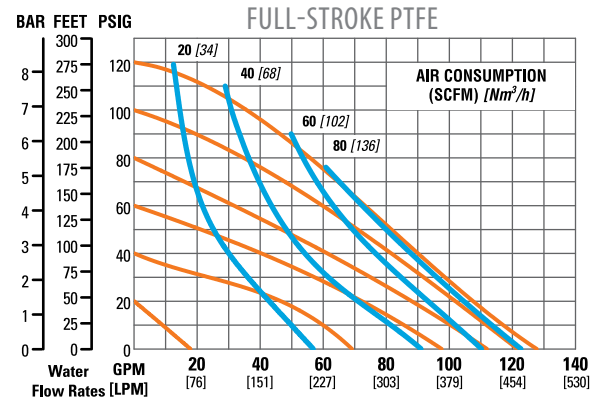
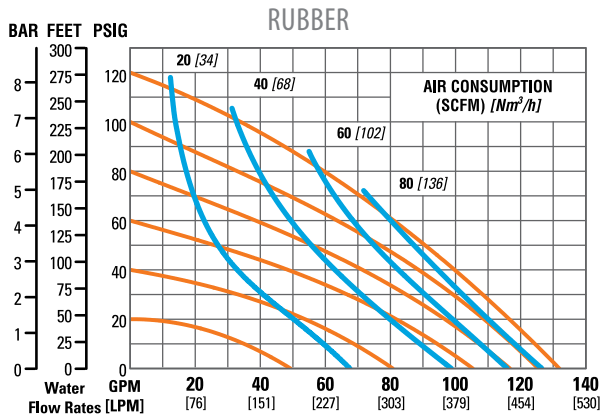


METAL CURVES



P800
51 mm (2")
METAL

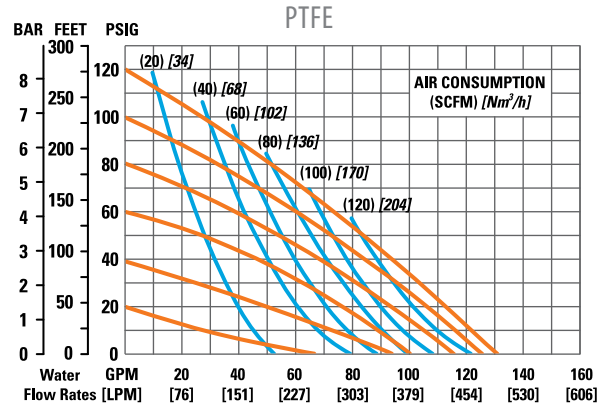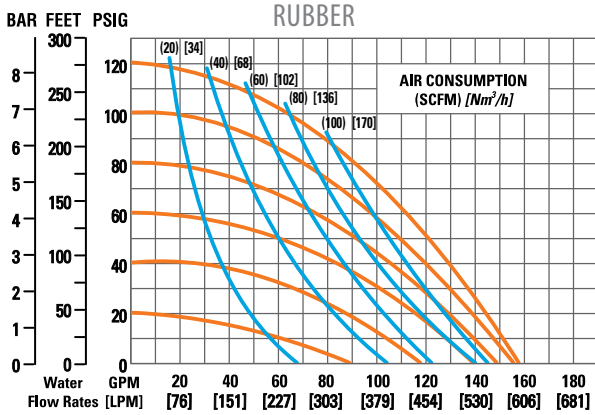



PX800
51 mm (2")
METAL

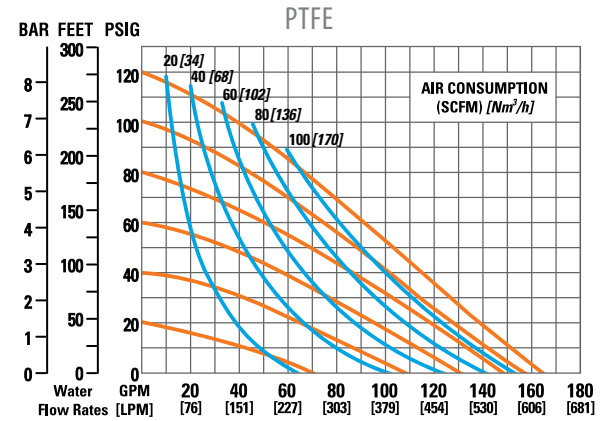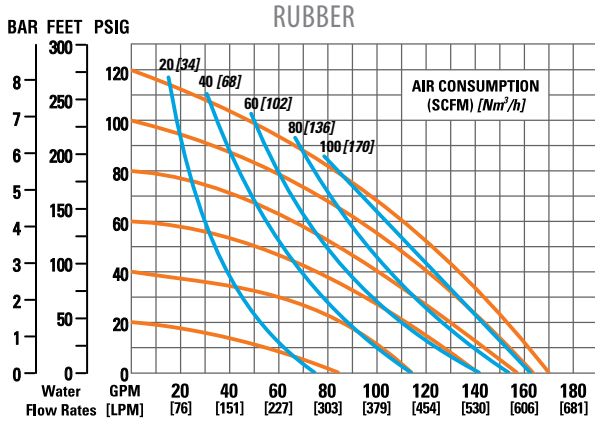

PS800
51 mm (2")
ALUMINUM

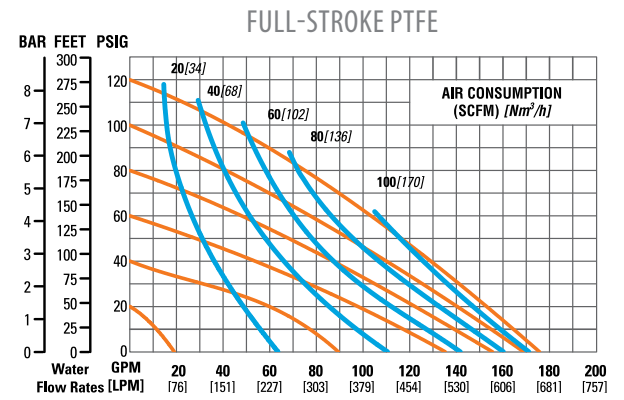
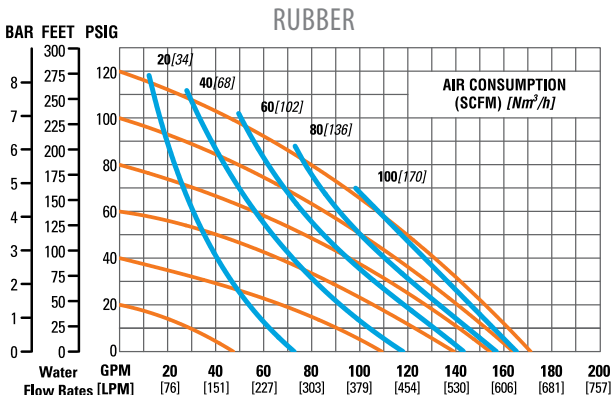


PS800
51 mm (2")
STAINLESS STEEL
DROP-IN

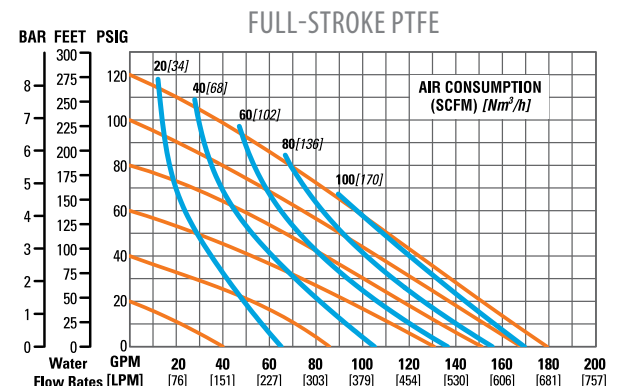
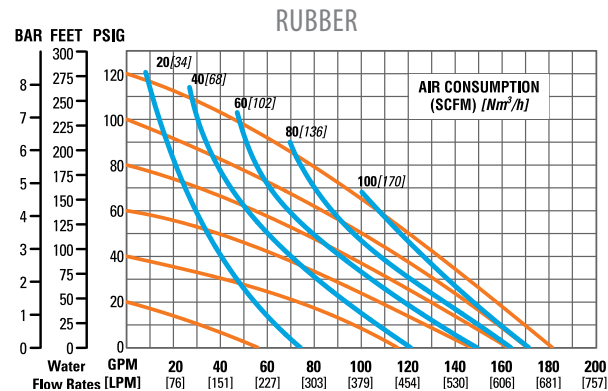


METAL CURVES



PX1500
76 mm (3")
ALUMINUM

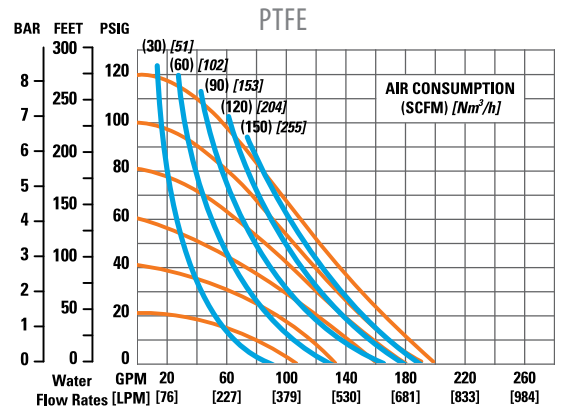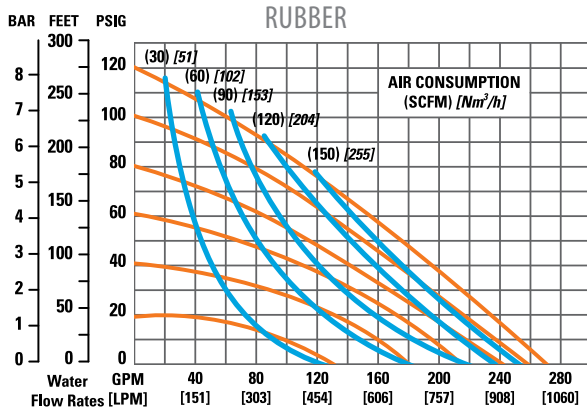



PX1500
76 mm (3")
STAINLESS STEEL

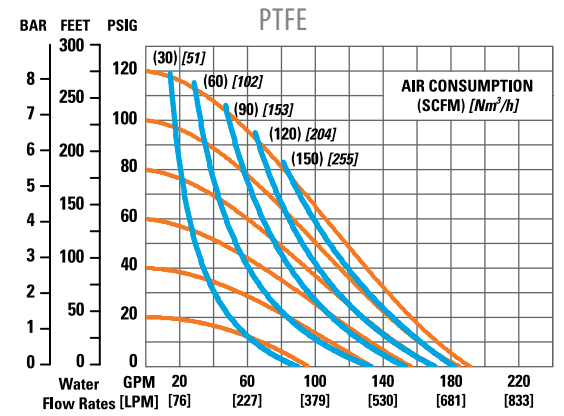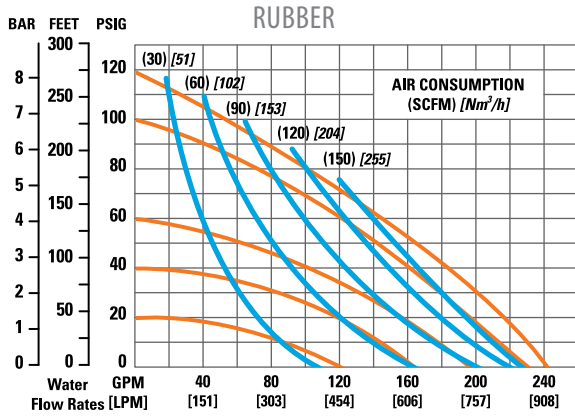

PS1500
76 mm (3")
ALUMINUM

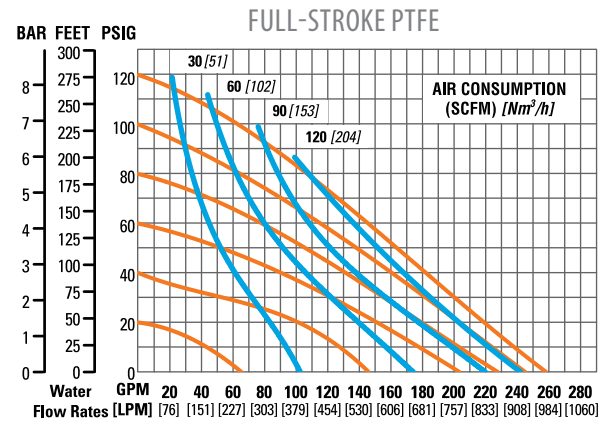
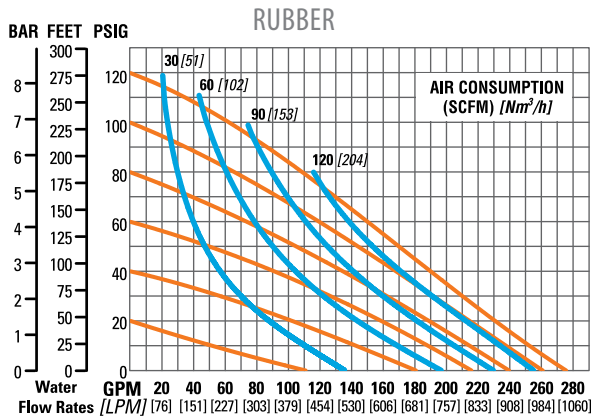


PS1500
76 mm (3")
STAINLESS STEEL

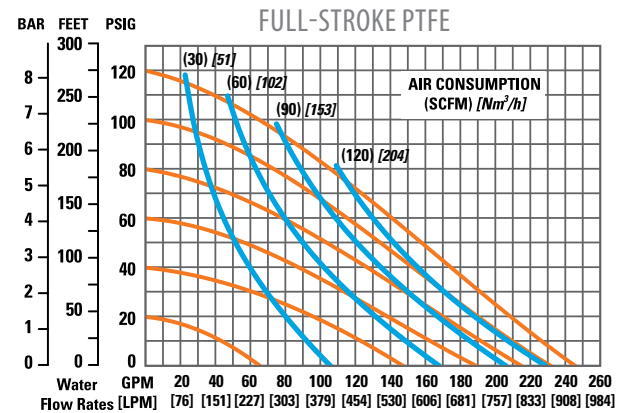
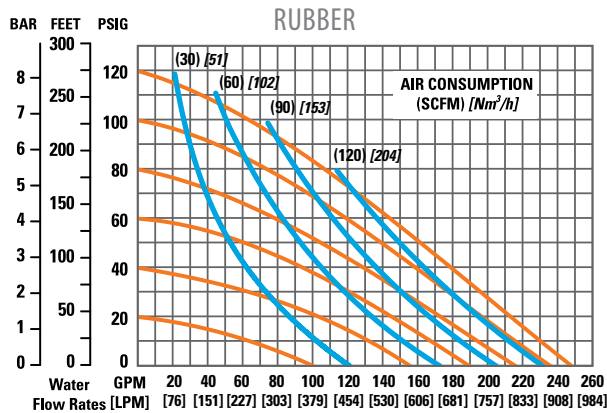


METAL CURVES


PS1500
76 mm (3")
ALUMINUM DROP-IN

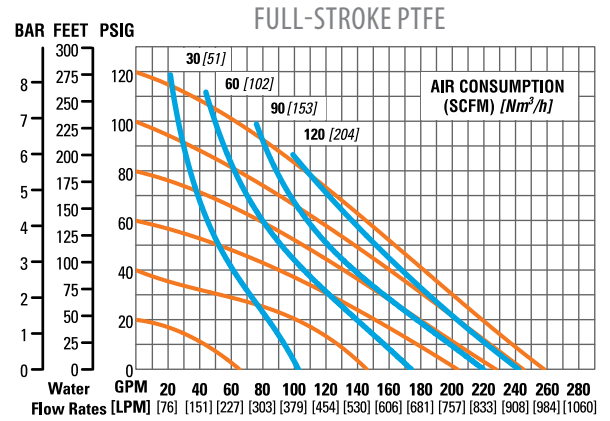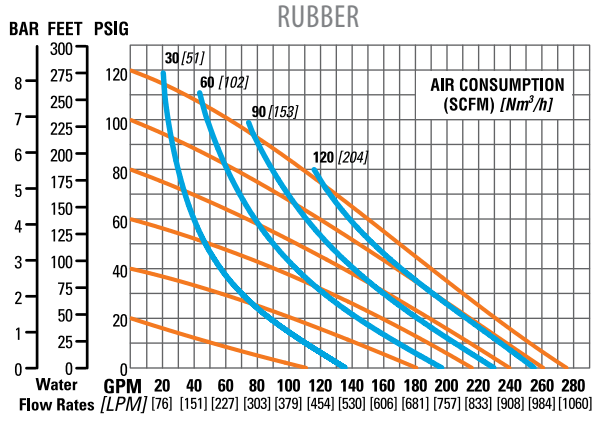


PS1500
76 mm (3")
STAINLESS STEEL DROP-IN

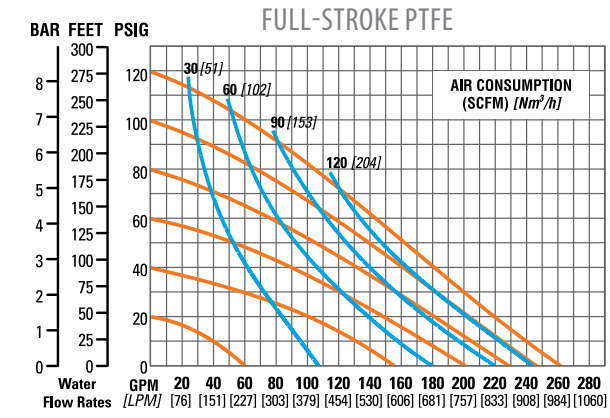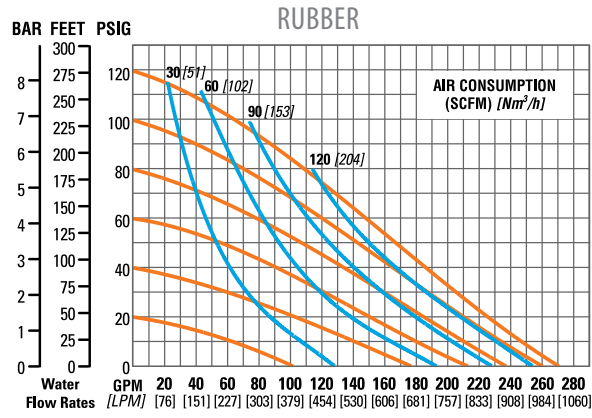


HIGH PRESSURE METAL CURVES

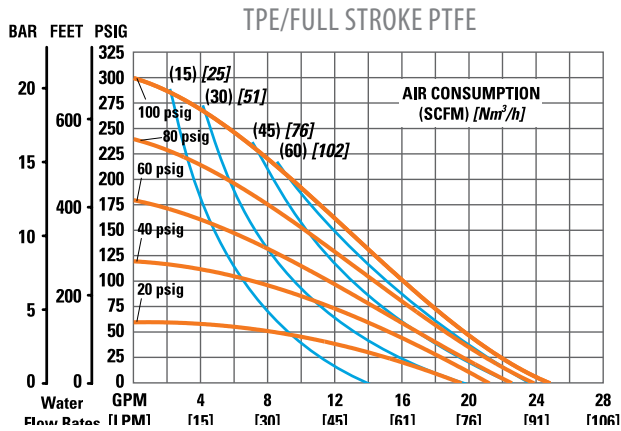


H200
25 mm (1")
METAL

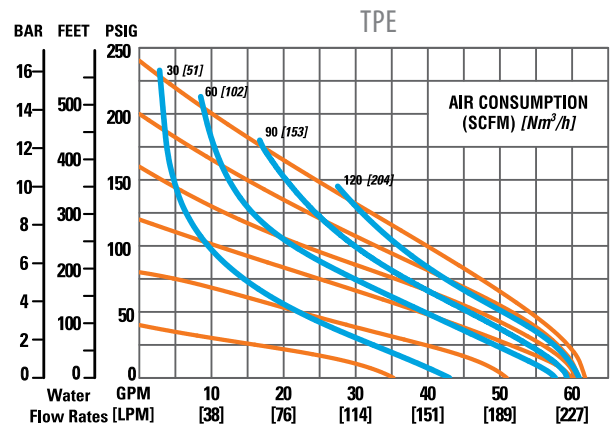


HX400 S
38 mm (1-1/2")
ALUMINUM

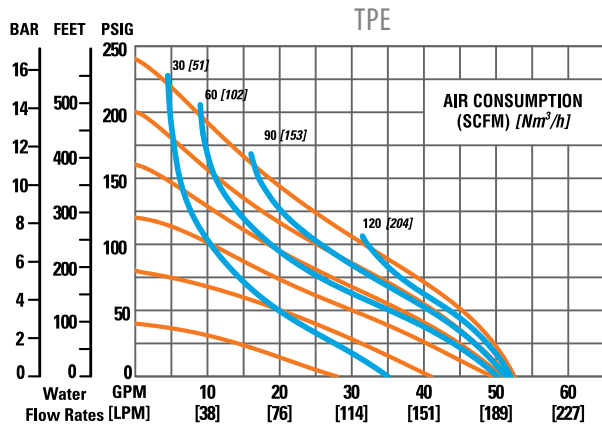

HX400 S
38 mm (1-1/2")
STAINLESS STEEL

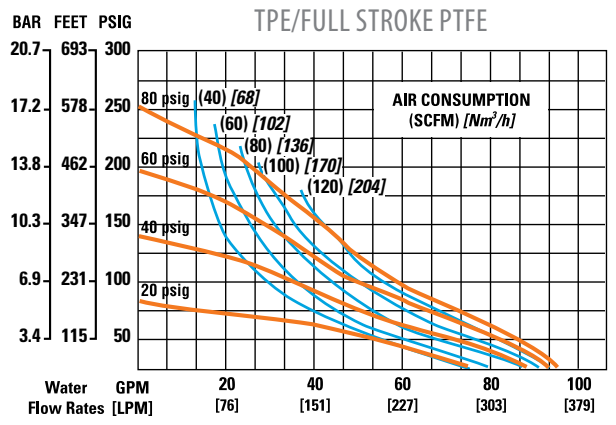


H800
51 mm (2")
ALUMINUM

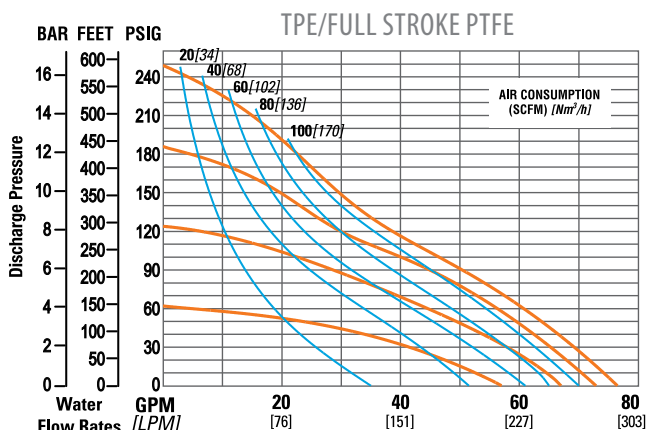


H1500 HS
76 mm (3")
STAINLESS STEEL

BRAHMA METAL CURVES

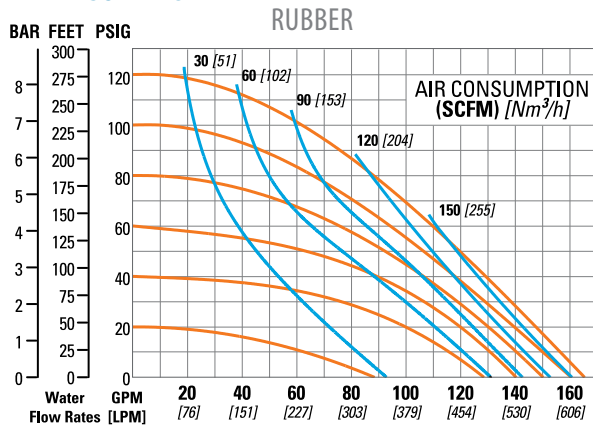

PX810
51 mm (2")
METAL

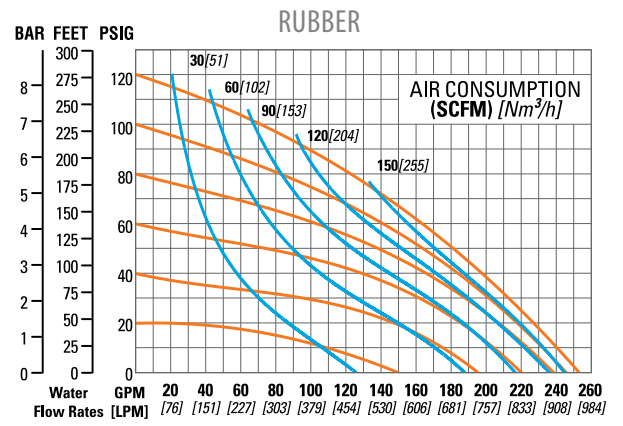

PX1510
76 mm (3")
METAL