

# UPS(N)



Grundfos UPS(N) pumps are the ideal choice for a wide range of domestic and commercial applications. The UPS(N) pumps are 3-speed wet rotor circulators and come in a wide range of materials and sizes. They feature an integrated pump and motor design ensuring greater ease of installation and durability. Maintenance free and whisper-quiet, these pumps are ideal for a variety of domestic and commercial heating and cooling systems.



## Features

### Energy efficient

A speed switch on the motor allows the pump to be adjusted to the needs of the application, improving pump efficiency and reducing energy consumption.

### Robust design

The pump is made of materials that ensure excellent corrosion resistance. Designed for open systems UPS(N) is constructed from quality stainless steel with a high grade composite impeller. The UPS is constructed from rugged cast iron and is the perfect choice for closed systems.

### Quiet operation

Canned motor provides an operating noise level at less than 43 decibels, the UPS is extremely quiet.

### Easy installation

The UPS is a compact, inline circulator pump, making it suitable for most installations.

## Operating Conditions

### System pressure

10 bar

### Liquid Temperature

2 to 110 °C

### Ambient Temperature

40 °C

### Relative Air Humidity

95 %

## Technical Data

### Mains voltage

1 x 240 V, 50 Hz

### Enclosure class

IP44

### Insulation class

F

### Sound pressure level

43 dB


### Approvals and markings

UPS(N) AS4020


## Applications

- Circulating hot or cold water in open or closed systems.

## Performance

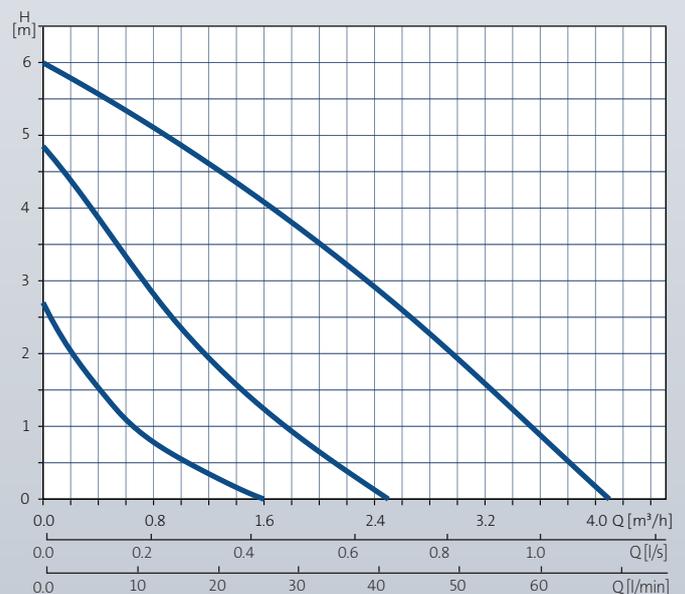

## Dimensions

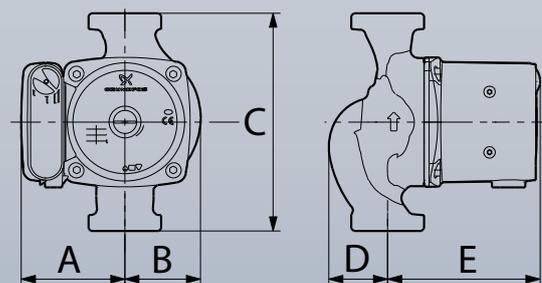

Model	Connection size	Dimensions (mm)					Weight (kg)
		A	B	C	D	E	
UPS20-60N	¾" F	75	51	150	28	102	2.8